


FUTURE Designs - NARO



# FUTURE Designs – NAROLINE23 48V LINEAR LUMINAIRE



NAROLINE23IO  
20° & 30° beam

NAROLINE23ET  
110° beam


NAROLINE23MP  
65° beam

Linear pendant, & surface mount to 48V tracks  
Recessed within deep 48V track.


W23mm x H 25mm  
560mm / 1000lm / 10W  
840mm / 1500lm / 15W  
1120mm / 2100lm / 20W  
3000K / 4000K  
Control Gear: Non dimming/DALI/Casambi



NAROLINE23WS FOR STANDARD 48V TRACK - SUSPENDED

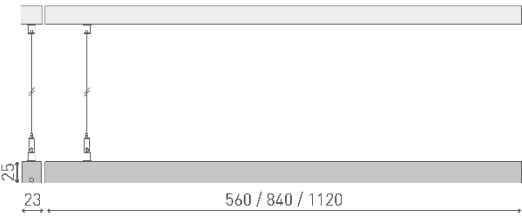

NAROLINE23 FOR STANDARD 48V TRACK - MOUNTED TO TRACK



Available with individual optics, microprism and etched diffuser  
48V Track length 1m, 2m & 3m

# FUTURE Designs – NAROSTIK 48V TRACK PENDANT



Cylinder 48V track pendant  
Suspended length up to 5m

Ø40mm / 350lm / 5W

45° beam

Ø50mm / 1000lm / 10W

30°, 40° & 60° beam

Ø60mm / 1500lm / 15W

30°, 40° & 60° beam


3000K / 4000K

Control Gear: Non dimming

DALI

Casambi

NAROSTIK FOR STANDARD 48V TRACK  
Narrow beam 20°, medium beam 40°, wide beam 60°

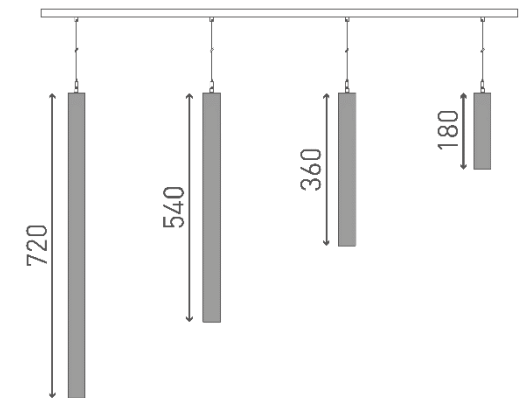

NAROSTIK Ø40 / Ø50 / Ø60

48V Track length 1m, 2m & 3m

# FUTURE Designs – NARO 48V SPOT LIGHTS

NAROBIT2WAY

NAROBIT 1 WAY



NAROBLOK 1WAY

NAROBLOK 3 WAY

NAROBLOK 5 WAY



## NAROBIT (STANDARD 48V TRACK)

Per head / 400lm / 5W / 30°, 40° & 60° beam

3000K / 4000K

Control Gear: Non dimming / DALI / Casambi

## NAROBLOK

1Way / 300lm / 2W / 28°, 48° & 36x26° beam

3Way / 1000lm / 6W / 28°, 48° & 36x26° beam

5Way / 1600lm / 10W / 28°, 48° & 36x26° beam

3000K / 4000K

Control Gear: Non dimming / DALI / Casambi

Shown with  
Deep track




Shown with  
standard track



## NAROBIT 1WAY FOR STANDARD 48V TRACK

⊙90° ⊙350°


Narrow beam 30°, medium beam 40°, wide beam 60°

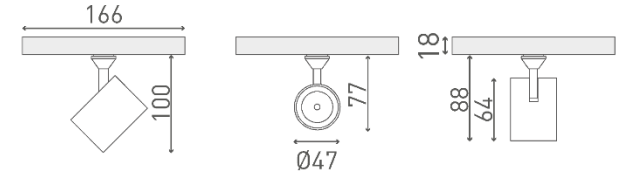

## NAROBIT 2WAY FOR STANDARD 48V TRACK

⊙90° ⊙350°

Narrow beam 30°, medium beam 40°, wide beam 60°

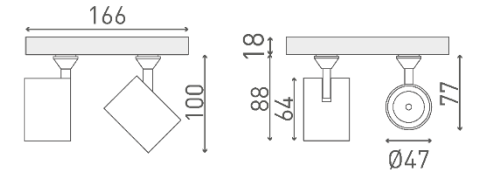


48V Track length 1m, 2m & 3m

## NAROBLOK FOR SHALLOW TRACK

⊙90° ⊙350°


Narrow Beam 30°, Wide Beam 40°, Assymetric beam 26° x 36°

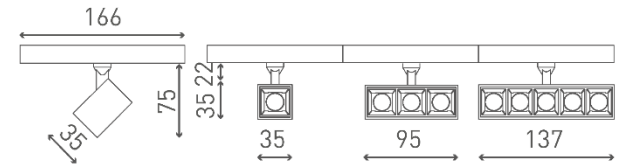

## NAROBLOK FOR SHALLOW & DEEP TRACK

⊙90° ⊙350°

Narrow Beam 30°, Wide Beam 40°, Assymetric beam 26° x 36°

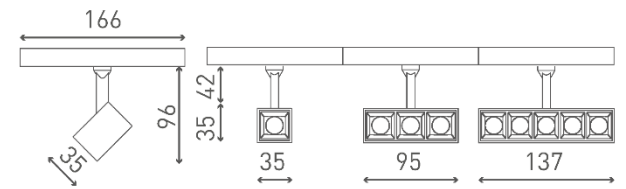


# FUTURE Designs – NARO 48V SPOT LIGHTS




**NAROSPOT**  
 Ø40mm / 350lm / 5W / 45° beam  
 Ø50mm / 1000lm / 10W / 30°, 40° & 60° beam  
 Ø60mm / 1500lm / 15W / 20°, 40° & 60° beam  
  
 3000K / 4000K  
 Control Gear: Non dimming / DALI / Casambi


**NAROMONO**  
 Ø60mm / 1600lm / 15W / 20°, 40° & 60° beam  
 Ø75mm / 3000lm / 24W / 30° & 40° beam  
 Ø85mm / 4000lm / 31W / 20°, 30° & 60° beam  
  
 3000K / 4000K  
 Control Gear: Non dimming / DALI / Casambi

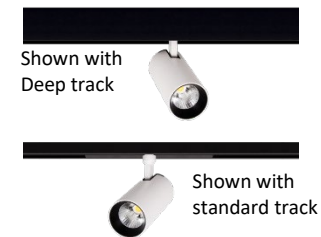


**NAROSPOT FOR STANDARD 48V TRACK**  
 C 90° C 350°  
 Ø50 & Ø60 Narrow beam 30°, medium beam 40°, wide beam 60°  
 Ø40 Medium Beam 45°

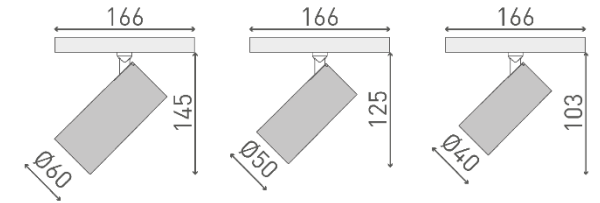


**NAROSPOT FOR 48V DEEP TRACK**  
 C 90° C 350°  
 Ø50 & Ø60 Narrow beam 30°, medium beam 40°, wide beam 60°  
 Ø40 Medium Beam 45°

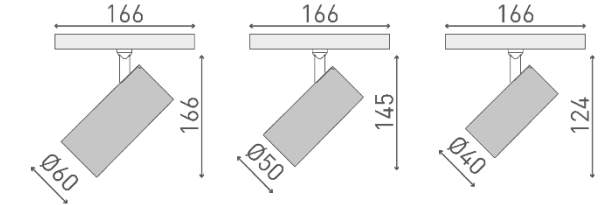

**NAROMONO60 / 70 / 85 FOR STANDARD 48V TRACK**  
 C 90° C 350°  
 Narrow beam 20°, medium beam 30°, wide beam 40°

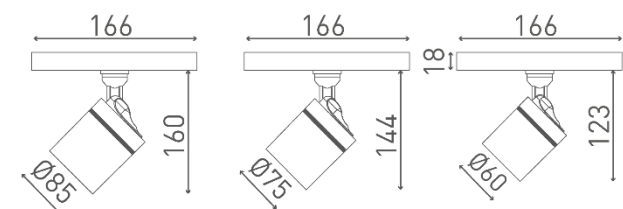


**NAROMONO60 / 70 / 85 FOR 48V DEEP TRACK**  
 C 90° C 350°  
 Narrow Beam 30°, Medium Beam 40°, Wide Beam 60°

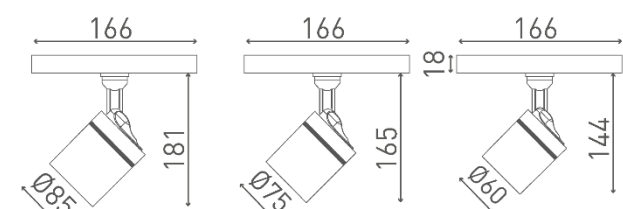

48V Track length 1m, 2m & 3m

# FUTURE Designs – NARO 48V Track info

## NARO 48V TRACK OPTIONS

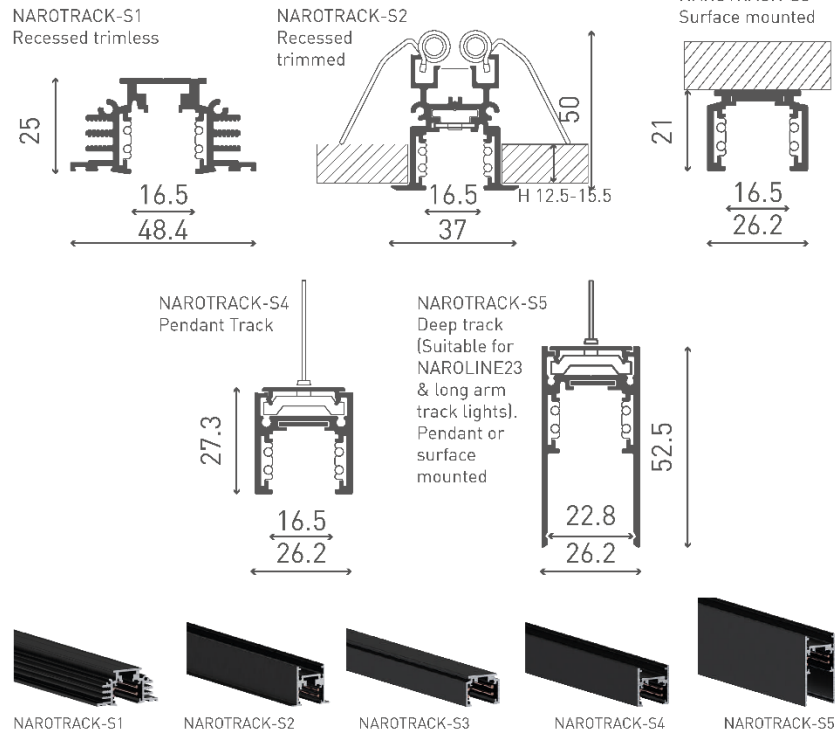

Track length 1m, 2m & 3m

90°connectors, flexible connectors, 90° corner sections & covers available

